

□ 120 cooling fan ×120×38mm






■ General Specifications

- Motor : 6 Poles brushless DC motor
- Frame & Impeller: Plastic (UL 94V-0)
- Storage temperature : -40° to +75°
- Operating temperature : -10° to +70°

■ Major Characteristic Parameters

品牌	轴承	电压	启动电压	电流	功率	转速	风量	静压	噪音		
型号	B/S	V	V	A	W	RPM	m3/min	CFM	mm-H2O	In-H2O	dba
SP120B24J-38DL	B / S	24	14.0~26.4	0.18	4.32	2300	2.87	101.4	8.1	0.32	38.0
SP120B48J-38DL	B / S	48	28.0~56.0	0.09	4.32	2300	2.87	101.4	8.1	0.32	38.0
SP120B12L-38DL	B / S	12	7.0~13.2	0.40	4.80	2600	3.25	114.7	10.4	0.41	41.0
SP120B24L-38DL	B / S	24	14.0~26.4	0.32	7.68	2600	3.25	114.7	10.4	0.41	41.0
SP120B48L-38DL	B / S	48	28.0~56.0	0.14	6.72	2600	3.25	114.7	10.4	0.41	41.0
SP120B12M-38DL	B / S	12	7.0~13.2	0.50	6.00	2900	3.49	123.2	11.3	0.45	44.0
SP120B24M-38DL	B / S	24	14.0~26.4	0.40	9.60	2900	3.49	123.2	11.3	0.45	44.0
SP120B48M-38DL	B / S	48	28.0~56.0	0.28	13.44	2900	3.49	123.2	11.3	0.45	44.0
SP120B12H-38DL	B / S	12	7.0~13.2	0.80	9.60	3200	3.85	135.9	13.8	0.54	48.0
SP120B24H-38DL	B / S	24	14.0~26.4	0.46	11.04	3200	3.85	135.9	13.8	0.54	48.0
SP120B48H-38DL	B / S	48	28.0~56.0	0.30	14.40	3200	3.85	135.9	13.8	0.54	48.0
SP120B12U-38DL	B / S	12	7.0~13.2	1.41	16.92	4200	5.05	178.4	23.8	0.94	54.0
SP120B24U-38DL	B / S	24	14.0~26.4	0.80	19.20	4200	5.05	178.4	23.8	0.94	54.0
SP120B24HU-38DL	B / S	24	14.0~26.4	0.92	22.08	5200	6.32	223.2	31.5	1.24	68.0

*Bearing system B: Two Ball Bearing S: Sleeve Bearing

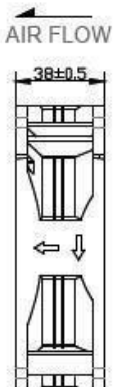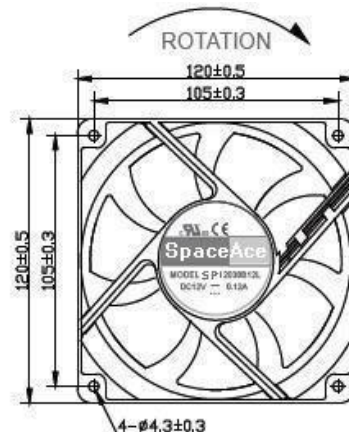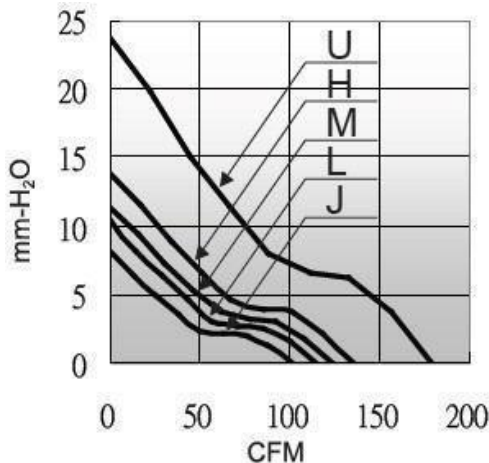

unit:mm